



ALLEGRA ZOOM




ALLEGRA ZOOM		02.104B01000	
Power	12W/15W		
Beam angle	15°-36°/36°-60°		
Color temperature	2700K/3000K/3500K/4000K		
Light efficiency	96lm/W		
Color rendering index	≥90		
Operating temperature	-25~50°C		
Rated life hours	35,000-50,000H LM80		
LED chip	COB		

OPTIONS

1	Non-DIM
2	TRIAC

SUITABLE TRACK SYSTEM

1	3-CIRCUITS
2	1-CIRCUIT



COLOUR | BK ■ WH □ | MATERIAL | AL



ALLEGRA ZOOM		02.104B02000	
Power	15W		
Beam angle	15°-36°/36°-60°		
Color temperature	2700K/3000K/3500K/4000K		
Light efficiency	88lm/W		
Color rendering index	≥90		
Operating temperature	-25~50°C		
Rated life hours	35,000-50,000H LM80		
LED chip	COB		

ALLEGRA ZOOM		02.104C02000	
Power	20W/25W/28W/30W		
Beam angle	15°-36°/36°-60°		
Color temperature	2700K/3000K/3500K/4000K		
Light efficiency	95lm/W		
Color rendering index	≥90		
Operating temperature	-25~50°C		
Rated life hours	35,000-50,000H LM80		
LED chip	COB		



ALLEGRA ZOOM		02.104D02000	
Power	32W/35W/42W		
Beam angle	15°-36°/36°-60°		
Color temperature	2700K/3000K/3500K/4000K		
Light efficiency	85lm/W		
Color rendering index	≥90		
Operating temperature	-25~50°C		
Rated life hours	35,000-50,000H LM80		
LED chip	COB		




OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI

SUITABLE TRACK SYSTEM

1	3-CIRCUITS DALI
2	1-CIRCUITS DALI
3	3-CIRCUITS
4	1-CIRCUIT

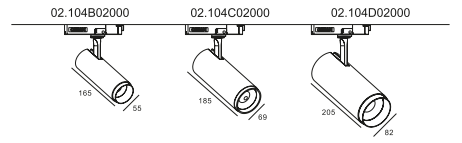

COLOUR | BK ■ WH □ | MATERIAL | AL



ALLEGRA ZOOM 03.104B03000	
Power	12W/15W
Beam angle	15°-36°/36°-60°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	97lm/W
Color rendering index	≥90
Operating temperature	-25~50°C
Rated life hours	35,000-50,000H LM80
LED chip	COB






ALLEGRA ZOOM 03.104C03000	
Power	20W/25W
Beam angle	15°-36°/36°-60°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	82lm/W
Color rendering index	≥90
Operating temperature	-25~50°C
Rated life hours	35,000-50,000H LM80
LED chip	COB



ALLEGRA ZOOM 03.104D03000	
Power	28W/32W
Beam angle	15°-36°/36°-60°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	89lm/W
Color rendering index	≥90
Operating temperature	-25~50°C
Rated life hours	35,000-50,000H LM80
LED chip	COB

OPTIONS

1	Non-DIM
2	TRIAC



COLOUR | BK ■ WH □ | MATERIAL | AL



ALLEGRA ZOOM 02.104B04000	
Power	10W/15W
Beam angle	15°-36°/36°-60°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	93lm/W
Color rendering index	≥90
Operating temperature	-25~50°C
Rated life hours	35,000-50,000H LM80
LED chip	COB



ALLEGRA ZOOM 02.104C04000	
Power	20W/25W/28W/30W
Beam angle	15°-36°/36°-60°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	81lm/W
Color rendering index	≥90
Operating temperature	-25~50°C
Rated life hours	35,000-50,000H LM80
LED chip	COB




ALLEGRA ZOOM 02.104D04000	
Power	32W/35W/42W
Beam angle	15°-36°/36°-60°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	87lm/W
Color rendering index	≥90
Operating temperature	-25~50°C
Rated life hours	35,000-50,000H LM80
LED chip	COB

OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI

SUITABLE TRACK SYSTEM

1	3-CIRCUITS DALI
2	1-CIRCUITS DALI
3	3-CIRCUITS
4	1-CIRCUIT

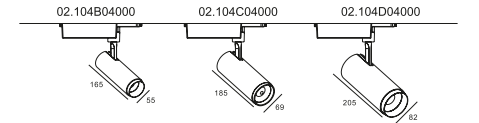

COLOUR | BK ■ WH □ | MATERIAL | AL