



ALLEGRA





ALLEGRA

HONEYCOMB

black



FW030-3



FW043-3



FW059-3



FW073-3

SCREENING CROSSPIECE

black



102A-P01



102B-P01



102C-P01



102D-P01

white



102A-P01



102B-P01



102C-P01



102D-P01

gold



102A-P01



102B-P01



102C-P01



102D-P01

CROSS-BARRLE

black



102B-P02



102C-P02



102D-P02





ALLEGRA	020102A01	
	Power	8W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	66lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		



ALLEGRA	020102D01	
	Power	28W/32W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	87lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		




ALLEGRA	020102B01	
	Power	12W/15W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	98lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		

OPTIONS	
1	NON-DIM
2	TRIAC
3	DALI



ALLEGRA	020102C01	
	Power	20W/25W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	84lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		

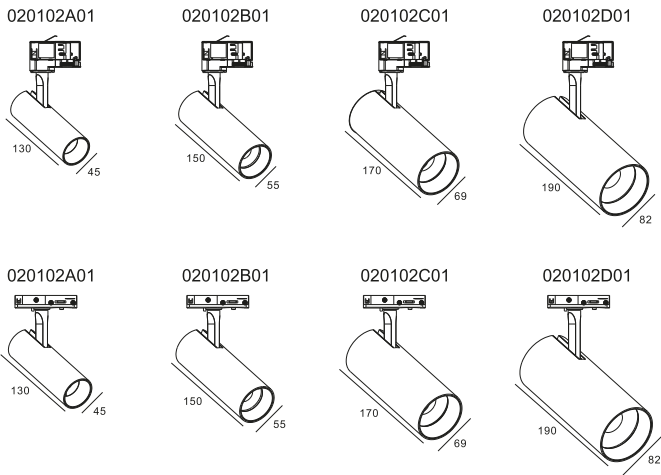



ALLEGRA	020102A02	
	Power	10W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	68lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP 20 220-240V 90° 355° Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable		



ALLEGRA	020102D02	
	Power	32W/35W/42W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	89lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP 20 220-240V 90° 355° Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable		




ALLEGRA	020102B02	
	Power	15W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	100lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP 20 220-240V 90° 355° Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable		

OPTIONS	
1	NON-DIM
2	TRIAC
3	DALI



ALLEGRA	020102C02	
	Power	20W/25W/28W/30W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	86lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP 20 220-240V 90° 355° Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable		

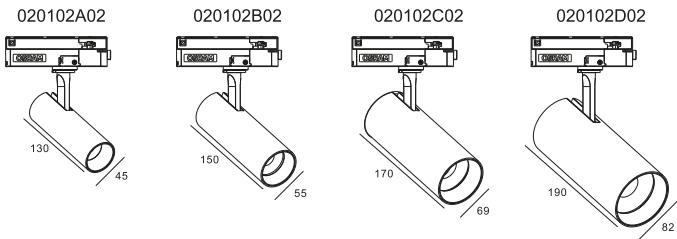



ALLEGRA	020102A03	
	Power	8W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	66lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP 20 220-240V Adjustable Adjustable UGR<19 Adjustable		



ALLEGRA	020102D03	
	Power	28W/32W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	87lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP 20 220-240V Adjustable Adjustable UGR<19 Adjustable		




ALLEGRA	020102B03	
	Power	12W/15W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	98lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP 20 220-240V Adjustable Adjustable UGR<19 Adjustable		

OPTIONS	
1	NON-DIM
2	TRIAC
3	DALI



ALLEGRA	020102C03	
	Power	20W/25W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	84lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP 20 220-240V Adjustable Adjustable UGR<19 Adjustable		

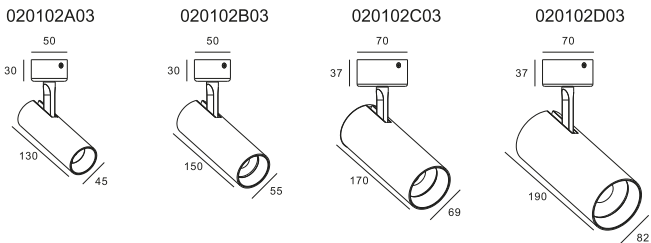



ALLEGRA	020102B04	
	Power	10W/15W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	98lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TÜV CCC IP 20 220-240V Adjustable Adjustable UGR<19 Adjustable		




ALLEGRA	020102C04	
	Power	20W/25W/28W/30W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	84lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TÜV CCC IP 20 220-240V Adjustable Adjustable UGR<19 Adjustable		



ALLEGRA	020102D04	
	Power	32W/35W/42W
	Beam angle	15°/23°/36°/50°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	87lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TÜV CCC IP 20 220-240V Adjustable Adjustable UGR<19 Adjustable		

OPTIONS	
1	NO DIM
2	DIM 1-10V
3	DALI 2

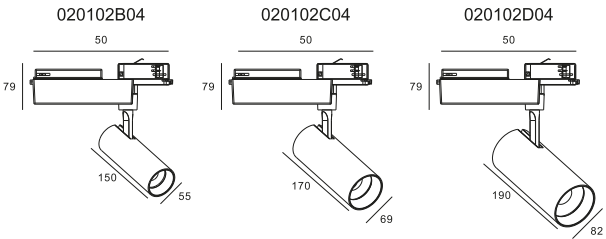

COLOUR | BK ■ WH □ | MATERIAL | AL |



ALLEGRA ZOOM



ALLEGRA	020104B01	
	Power	12W/15W
	Beam angle	15°-36°/36°-60°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	96lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		




ALLEGRA	020104C01	
	Power	20W/25W
	Beam angle	15°-36°/36°-60°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	80lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		



ALLEGRA	020104D01	
	Power	28W/32W
	Beam angle	15°-36°/36°-60°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	90lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		

OPTIONS

1	NON-DIM
2	TRIAC
3	DALI

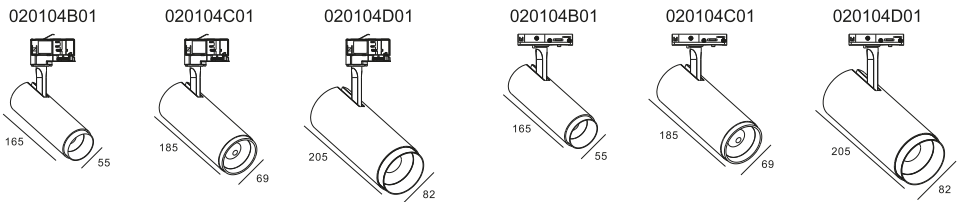

COLOUR | BK ■ WH □ | MATERIAL | AL |



ALLEGRA	020104B02	
	Power	15W
	Beam angle	15°-36°/36°-60°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	95lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		




ALLEGRA	020104C02	
	Power	20W/25W/28W/30W
	Beam angle	15°-36°/36°-60°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	85lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		



ALLEGRA	020104D02	
	Power	32W/35W/42W
	Beam angle	15°-36°/36°-60°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	88lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		

OPTIONS

1	NON-DIM
2	TRIAC
3	DALI

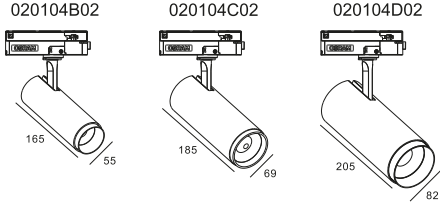

COLOUR | BK ■ WH □ | MATERIAL | AL |



ALLEGRA	020104B03	
	Power	12W/15W
	Beam angle	15°-36°/36°-60°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	97lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		



ALLEGRA	020104B04	
	Power	10W/15W
	Beam angle	15°-36°/36°-60°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	93lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		



ALLEGRA	020104C03	
	Power	20W/25W
	Beam angle	15°-36°/36°-60°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	82lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		



ALLEGRA	020104C04	
	Power	20W/25W/28W/30W
	Beam angle	15°-36°/36°-60°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	81lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		




ALLEGRA	020104D03	
	Power	28W/32W
	Beam angle	15°-36°/36°-60°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	89lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		



ALLEGRA	020104D04	
	Power	32W/35W/42W
	Beam angle	15°-36°/36°-60°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	87lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE CB TUV IP20 220-240V Adjustable Adjustable Euro adapt UGR<19 Adjustable		

OPTIONS


1	NON-DIM
2	TRIAC
3	DALI

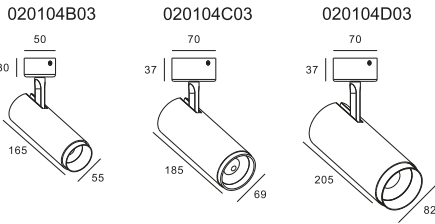

COLOUR | BK ■ WH □ | MATERIAL | AL |

OPTIONS

1	NON-DIM
2	TRIAC
3	DALI

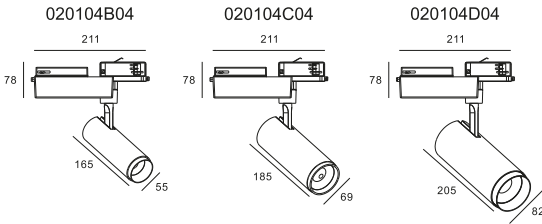

COLOUR | BK ■ WH □ | MATERIAL | AL |