







LATTICE



-  shiny silver
-  rose gold
-  gold
-  bright black
-  matt black
-  matt white





LATTICE		01.180A01000
Power		2W
Beam angle		22°/36°/45°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		50lm/W
Color rendering index		≥90
Operating temperature		-25~50°C
Rated life hours		35,000-50,000H LM80
LED chip		SMD



LATTICE		01.180A10000
Power		20W
Beam angle		22°/36°/45°
Color temperature		2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency		79lm/W
Color rendering index		≥90
Operating temperature		-25~50°C
Rated life hours		35,000-50,000H LM80
LED chip		SMD



LATTICE		01.180A02000
Power		4W
Beam angle		22°/36°/45°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		60lm/W
Color rendering index		≥90
Operating temperature		-25~50°C
Rated life hours		35,000-50,000H LM80
LED chip		SMD



LATTICE		01.180A15000
Power		30W
Beam angle		22°/36°/45°
Color temperature		2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency		79lm/W
Color rendering index		≥90
Operating temperature		-25~50°C
Rated life hours		35,000-50,000H LM80
LED chip		SMD



LATTICE		01.180A03000
Power		6W
Beam angle		22°/36°/45°
Color temperature		2700K/3000K/3500K/4000K
Light efficiency		62lm/W
Color rendering index		≥90
Operating temperature		-25~50°C
Rated life hours		35,000-50,000H LM80
LED chip		SMD




LATTICE		01.180A05000
Power		10W
Beam angle		22°/36°/45°
Color temperature		2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency		73lm/W
Color rendering index		≥90
Operating temperature		-25~50°C
Rated life hours		35,000-50,000H LM80
LED chip		SMD

OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

ACCESSORIES

	FROSTED LENS
	SQUARE SPREAD LENS
	RECTANGLE SPREAD LENS

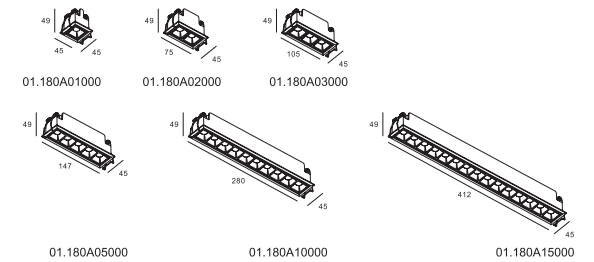

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |