



CD Linear M - W40 Series



Length

305mm 610mm 915mm 1220mm 500mm
1000mm

Beam angle

It can deliver high efficiency light output and uniform beam with professional lens.

RGBW 4 in 1 color:

28°*52°/22°/25°/38°/45°/55°

Warranty

5 Year Warranty

Control

Standard DMX512 control protocol (Max 44 frames / second).
The communication between fittings can be synchronised perfectly under use of Titan Artnet Controller.


Protection

Lightning and ESD Protection
Electrical Protections: short circuit, over current, over voltage and over temperature.




Slim for narrow space

This washer is a high performance linear LED luminaire designed for grazing or flood lighting exterior facade with white color.

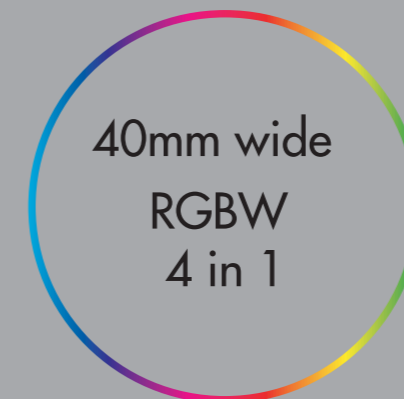

Dimension

± 50° Tilt

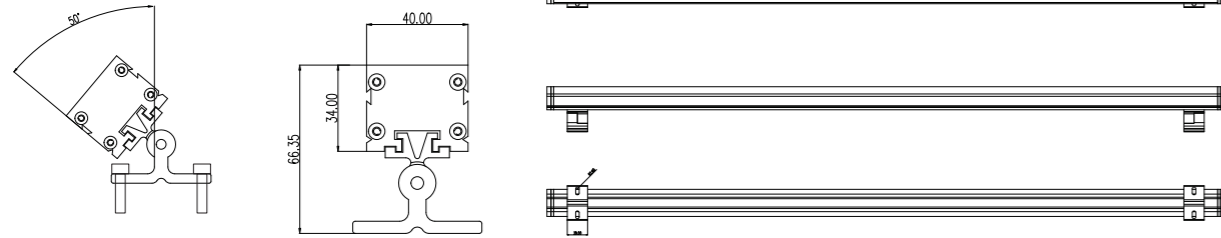

Ordering Information

Product	Width	Length	LED QTY	LED Color
W	40	100	24	04
LED Washer	40mm Wide	030 305mm 060 610mm 090 915mm 120 1220mm 050 500mm 100 1000mm	06 LEDs 12 LEDs 18 LEDs 24 LEDs 12 LEDs 24 LEDs	04 RGBW

W401002404

Colors



RGBW 4 in 1

LED

LED Source	CREE CLQ6A
LED QTY	24pcs
Beam Angle	28°*52°/22°/25°/38°/45°/55°

Electrical

Input voltage	24VDC
power consumption	36W

Control

Protocol	DMX512
Pixels	4 channel per fixture
Addressing options	Manual addressing

Physical

Housing Material	Aluminium	Mounting Options	Surface mount
Finish	Black/White/Silver	Luminaire Connection	5PIN cable with screw lock connector for DC and DMX
Lenze	4mm Toughened Glass		

Environment

Operating Temperature	-30° to 60°	Humidity	0-95%,non-condensing
Startup Temperature	-30° to 60°	IP	Outdoor IP66
Storage Temperature	-40° to 80°		

Certificate



RoHS

RGBW 4 in 1 Color



FWHM28°*52°



FWHM22°




FWHM25°



FWHM38°




FWHM45°

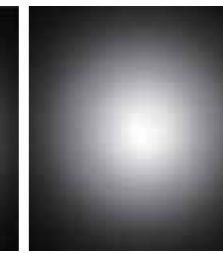


FWHM55°

Wiring Diagram

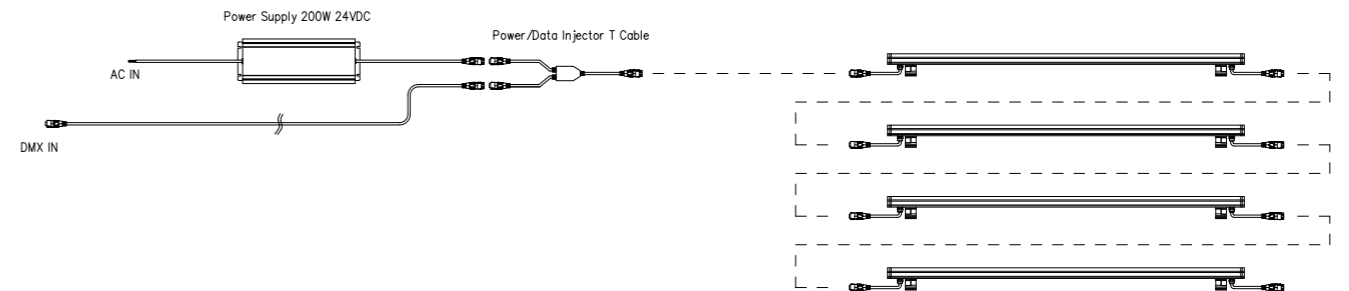

Interconnection

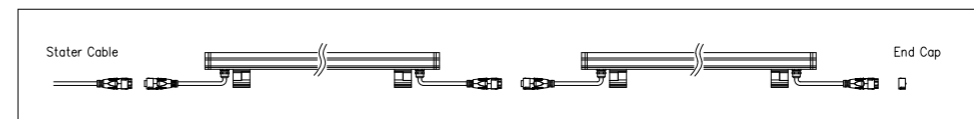

Maximim Run Lengths

36W per meter	
24VDC	up to 4meter