



LATTICE MINI



LATTICE MINI	01.216A06000
Power	10W
Beam angle	19°/23°/31°
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency	71lm/W
Color rendering index	≥90
Operating temperature	-25-50
Rated life hours	35,000-50,000H LM80
LED chip	SMD



LATTICE MINI	01.216A09000
Power	15W
Beam angle	19°/23°/31°
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency	71lm/W
Color rendering index	≥90
Operating temperature	-25-50
Rated life hours	35,000-50,000H LM80
LED chip	SMD




LATTICE MINI	01.216A12000
Power	20W
Beam angle	19°/23°/31°
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K
Light efficiency	82lm/W
Color rendering index	≥90
Operating temperature	-25-50
Rated life hours	35,000-50,000H LM80
LED chip	SMD



OPTIONS

1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

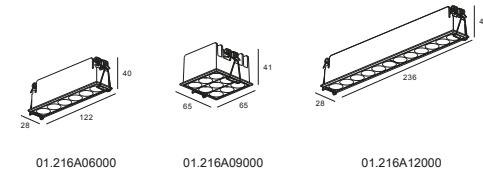

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |