TRELLIS

shiny silver | rose gold | gold | matt black | matt white

spacecannon

spacecannon

TRELLIS 010180A01

Power	2W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	45lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20

220-240V Voltage | 37*37mm | UGR<19 | Fixed

TRELLIS 010180A02

Power	4W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	60lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20

220-240V Voltage | 68*37mm | UGR<19 | Fixed

TRELLIS 010180A03

Power	6W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	50lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20

220-240V Voltage | 100*37mm | UGR<19 | Fixed

TRELLIS 010180A05

Power	10W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	54lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20

220-240V Voltage | 140*37mm | UGR<19 | Fixed

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

spacecannon

TRELLIS 010180A10

Power	20W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	61lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20

220-240V Voltage | 273*37mm | UGR<19 | Fixed

TRELLIS 010180A15

Power	30W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	75lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20

220-240V Voltage | 405*37mm | UGR<19 | Fixed

OPTIONS

1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC

ACCESSORIES

ROUND SPREAD LENS	RECTANGLE SPREAD LENS	SQUARE SPREAD LENS

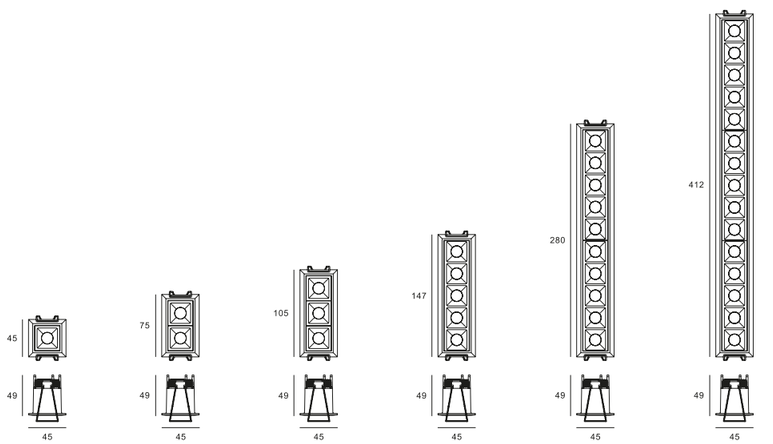

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

spacecannon

TRELLIS WASH

shiny silver | rose gold | gold | matt black | matt white

TRELLIS WASH	010180A05	
	Power	10W
	Beam angle	wallwasher
	Color temperature	2700K/3000K/3500K/4000K/5000K/RGBW
	Light efficiency	43lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	SMD

CE CB TÜV IP 20

220-240V Voltage | 140*37mm | UGR<19 | Wall washer

TRELLIS WASH	010180A10	
	Power	20W
	Beam angle	wallwasher
	Color temperature	2700K/3000K/3500K/4000K/5000K/RGBW
	Light efficiency	48lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	SMD

CE CB TÜV IP 20

220-240V Voltage | 273*37mm | UGR<19 | Wall washer

TRELLIS WASH	010180A15	
	Power	30W
	Beam angle	wallwasher
	Color temperature	2700K/3000K/3500K/4000K/5000K/RGBW
	Light efficiency	50lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	SMD

CE CB TÜV IP 20

220-240V Voltage | 405*37mm | UGR<19 | Wall washer

OPTIONS

1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC

010180A05



010180A10



010180A15



COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

spacecannon

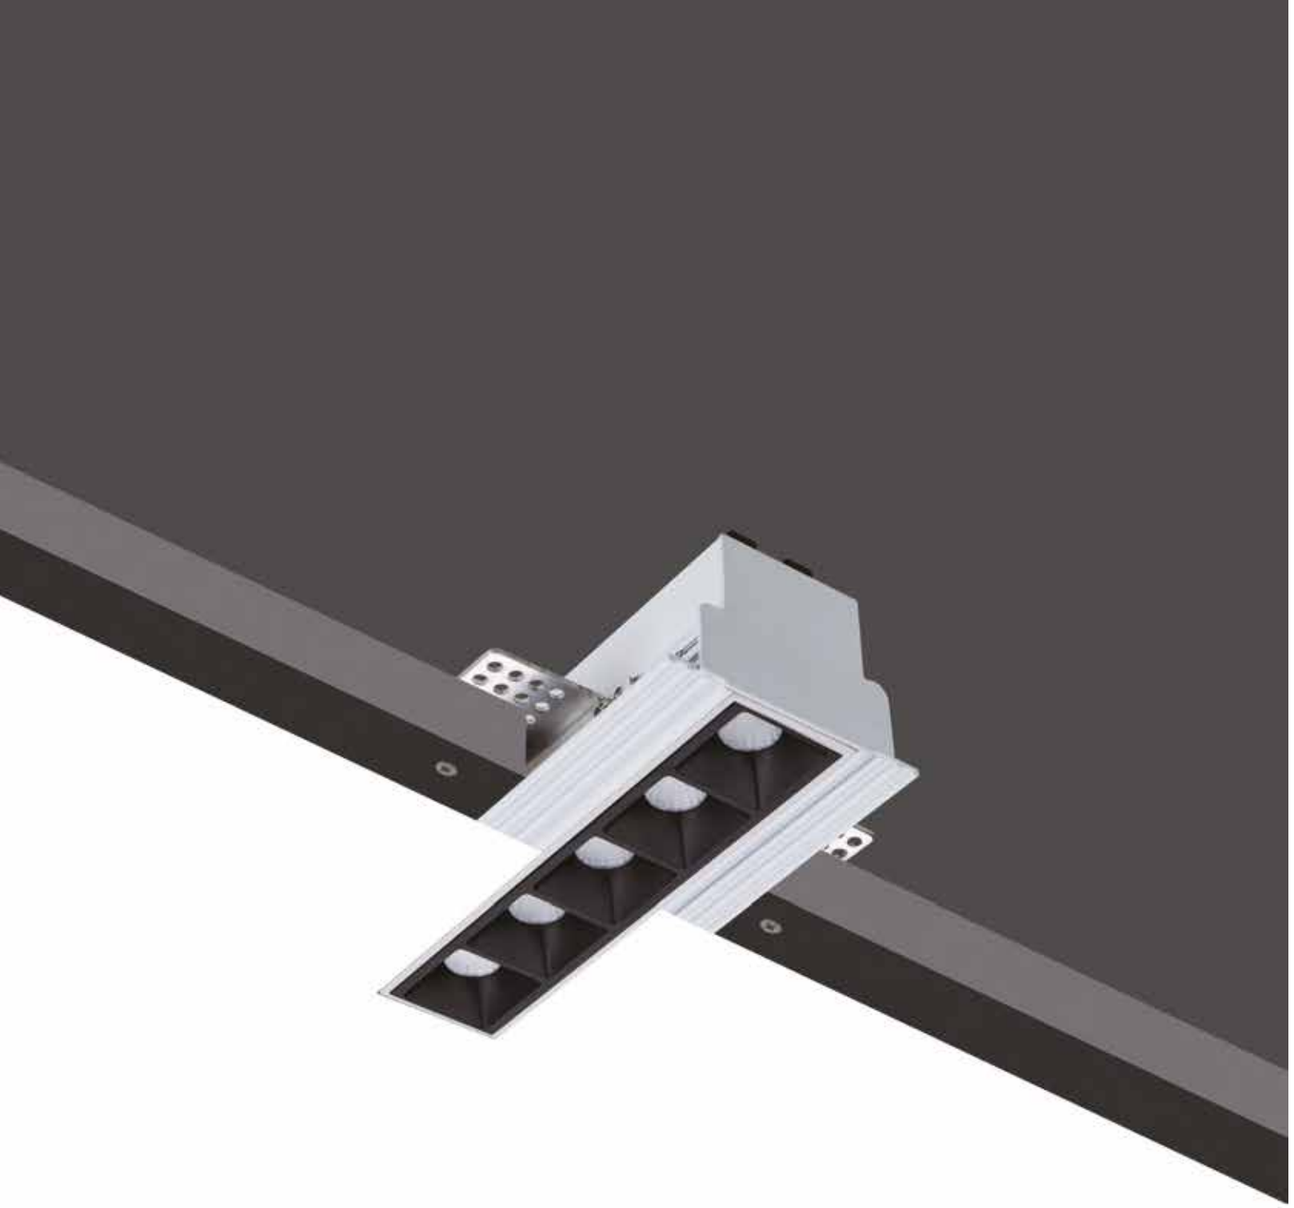

TRELLIS TRIMLESS

shiny silver rose gold gold matt black matt white

spacecannon

TRELLIS TRIMLESS 010180B02

Power	4W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	60lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV | IP 20 | 220-240V Voltage | 75*70mm | UGR<19 | Fixed

TRELLIS TRIMLESS 010180B03

Power	6W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	50lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV | IP 20 | 220-240V Voltage | 105*70mm | UGR<19 | Fixed

TRELLIS TRIMLESS 010180B05

Power	10W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	54lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV | IP 20 | 220-240V Voltage | 145*70mm | UGR<19 | Fixed

010180B10

Power	20W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	61lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV | IP 20 | 220-240V Voltage | 278*70mm | UGR<19 | Fixed

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

spacecannon

TRELLIS TRIMLESS 010180B15

Power	30W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	75lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV | IP 20 | 220-240V Voltage | 410*70mm | UGR<19 | Fixed

OPTIONS

1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC

ACCESSORIES

ROUND SPREAD LENS	RECTANGLE SPREAD LENS	SQUARE SPREAD LENS

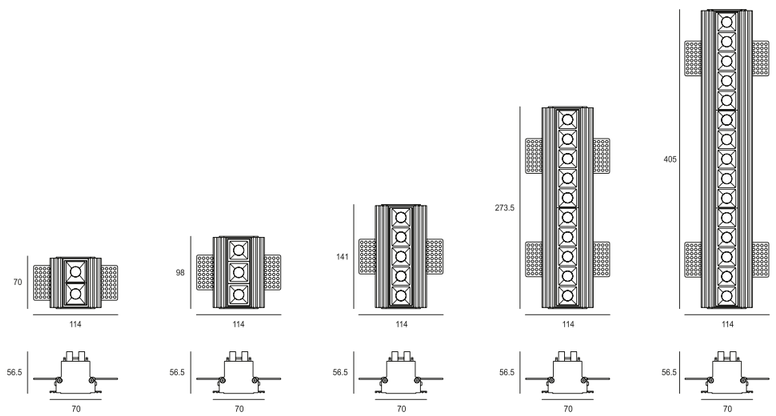

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

spacecannon

TRELLIS ADJUSTABLE

shiny silver rose gold gold matt black matt white

spacecannon

TRELLIS ADJUSTABLE 010180C01

Power	2W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	45lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20 | 220-240V Voltage | 30° Adjustable | 55*45mm | UGR<19 | Adjustable

TRELLIS ADJUSTABLE 010180C02

Power	4W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	60lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20 | 220-240V Voltage | 30° Adjustable | 75*45mm | UGR<19 | Adjustable

TRELLIS ADJUSTABLE 010180C03

Power	6W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	50lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20 | 220-240V Voltage | 30° Adjustable | 110*45mm | UGR<19 | Adjustable

TRELLIS ADJUSTABLE 010180C05

Power	10W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	54lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20 | 220-240V Voltage | 30° Adjustable | 155*45mm | UGR<19 | Adjustable

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

spacecannon

TRELLIS ADJUSTABLE 010180C10

Power	20W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	61lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20 | 220-240V Voltage | 30° Adjustable | 290*45mm | UGR<19 | Adjustable

TRELLIS ADJUSTABLE 010180C15

Power	30W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	75lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20 | 220-240V Voltage | 30° Adjustable | 420*45mm | UGR<19 | Adjustable

OPTIONS

1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC

ACCESSORIES

ROUND SPREAD LENS | RECTANGLE SPREAD LENS | SQUARE SPREAD LENS

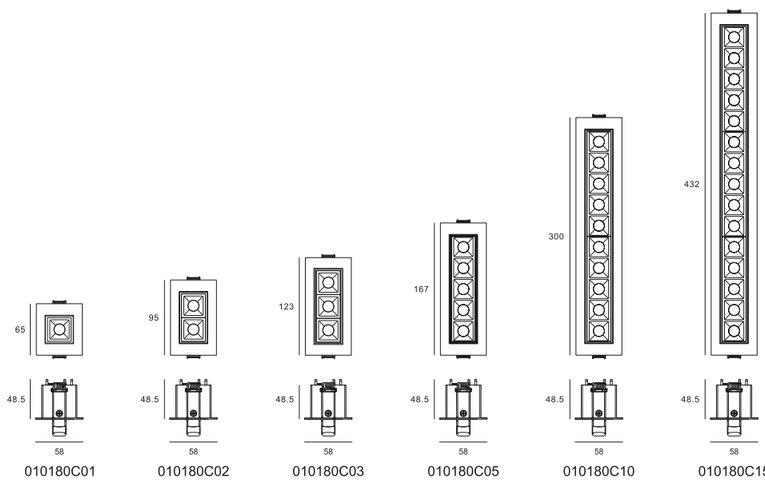

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

spacecannon

TRELLIS SURFACE

shiny silver rose gold gold matt black matt white

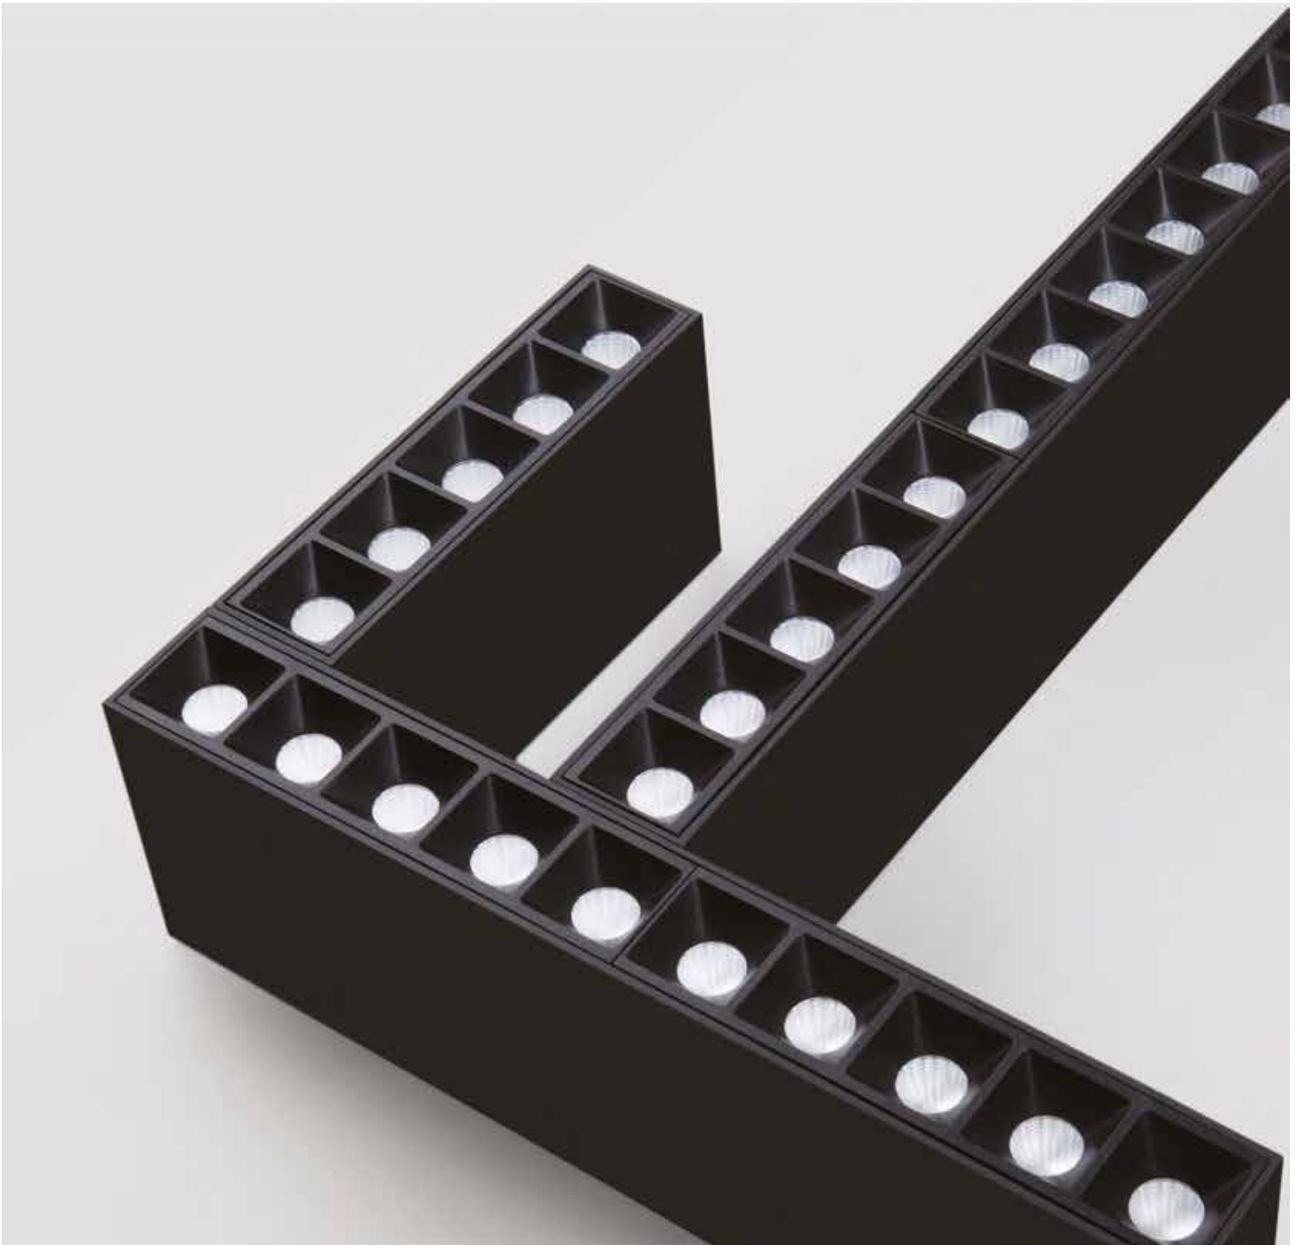

spacecannon



TRELLIS SURFACE 010180D02

Power	4W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	48lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20 | 220-240V Voltage | UGR<19 | Fixed

TRELLIS SURFACE 010180D05

Power	10W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	55lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20 | 220-240V Voltage | UGR<19 | Fixed

TRELLIS SURFACE 010180D10

Power	20W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	70lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20 | 220-240V Voltage | UGR<19 | Fixed

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

spacecannon

TRELLIS SURFACE 010180D15

Power	30W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	70lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TÜV IP 20 | 220-240V Voltage | UGR<19 | Fixed

OPTIONS

1	NO DIM
2	TRIAC

ACCESSORIES

ROUND SPREAD LENS	RECTANGLE SPREAD LENS	SQUARE SPREAD LENS

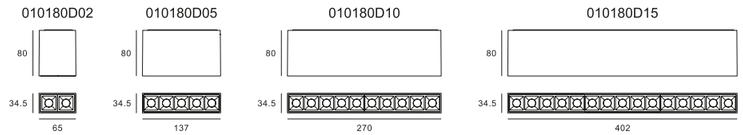

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |