

-  shiny silver
-  rose gold
-  gold
-  bright black
-  matt black
-  matt white

LATTICE TRIMLESS






LATTICE TRIMLESS		01.180B02000
Power	4W	
Beam angle	22°/36°/45°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	50lm/W	
Color rendering index	≥90	
Operating temperature	-25-50°C	
Rated life hours	35,000-50,000H LM80	
LED chip	SMD	



LATTICE TRIMLESS		01.180B15000
Power	30W	
Beam angle	22°/36°/45°	
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K	
Light efficiency	79lm/W	
Color rendering index	≥90	
Operating temperature	-25-50°C	
Rated life hours	35,000-50,000H LM80	
LED chip	SMD	



LATTICE TRIMLESS		01.180B03000
Power	6W	
Beam angle	22°/36°/45°	
Color temperature	2700K/3000K/3500K/4000K	
Light efficiency	62lm/W	
Color rendering index	≥90	
Operating temperature	-25-50°C	
Rated life hours	35,000-50,000H LM80	
LED chip	SMD	



LATTICE TRIMLESS		01.180B05000
Power	10W	
Beam angle	22°/36°/45°	
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K	
Light efficiency	73lm/W	
Color rendering index	≥90	
Operating temperature	-25-50°C	
Rated life hours	35,000-50,000H LM80	
LED chip	SMD	




LATTICE TRIMLESS		01.180B10000
Power	20W	
Beam angle	22°/36°/45°	
Color temperature	2700K/3000K/3500K/4000K/2700K-6000K	
Light efficiency	79lm/W	
Color rendering index	≥90	
Operating temperature	-25-50°C	
Rated life hours	35,000-50,000H LM80	
LED chip	SMD	



COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

OPTIONS	
1	Non-DIM
2	TRIAC
3	0/1-10V
4	DALI
5	BLE
6	ZIGBEE

ACCESSORIES	
	FROSTED LENS
	SQUARE SPREAD LENS
	RECTANGLE SPREAD LENS

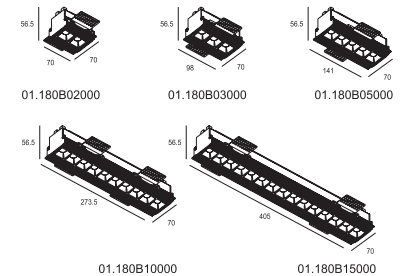

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |