



MINO



MINO	04.007C00000
Power	3W
Beam angle	12°/20°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	55lm/W
Color rendering index	≥90
Operating temperature	-25~50°C
Rated life hours	35,000-50,000H LM80
LED chip	SMD


CE CB TUV
CCC
IP 20
220-240V
Ø35mm
UGR<19
Fixed

MINO	04.007D00000
Power	3W
Beam angle	12°/20°
Color temperature	2700K/3000K/3500K/4000K
Light efficiency	55lm/W
Color rendering index	≥90
Operating temperature	-25~50°C
Rated life hours	35,000-50,000H LM80
LED chip	SMD

CE CB TUV
CCC
IP 20
220-240V
UGR<19
Fixed

OPTIONS

1	Non-DIM
---	---------

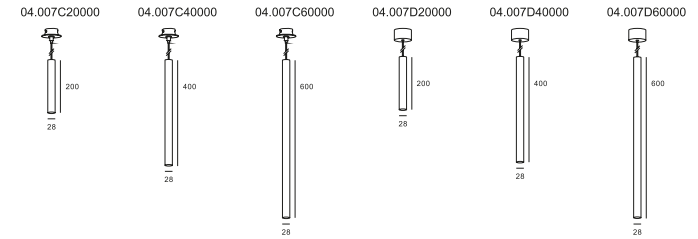

COLOUR | BK ■ WH □ | MATERIAL | AL